
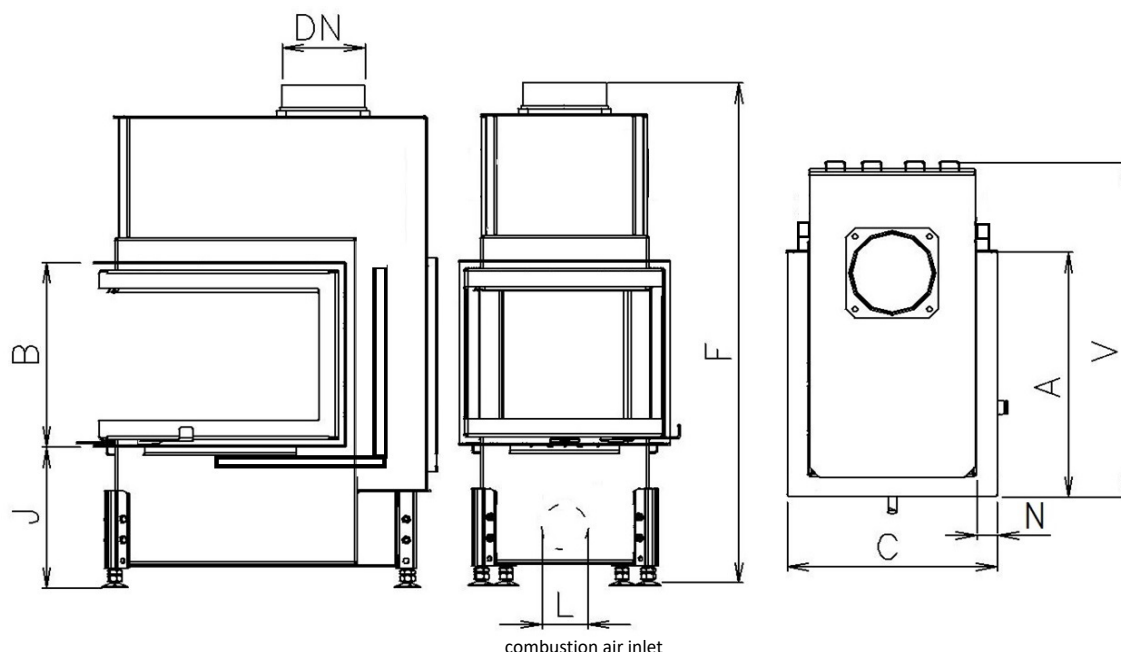



Basic design:

External air intel
 Black vermiculite grooves lining (VEDRC)
 Black printed glass(SM)
 Black door-handle RP1A
 Enviromentally friendly varnish
 Removable cover frame (KR)

Sizes			CHOPOK O/R90 67 LD2 670/450-S/500	CHOPOK O/R90 67 LD2 670/510-S/500
1	A	mm	670	
2	F	mm	1210	1270
3	C	mm	500	
4	DN	Ø mm	180	
5	B	mm	450	510
6	V	mm	940	
7	R	mm		
8	AA	mm		
9	H	mm		
10	J	mm	325 + /160/	
11	K	Ø mm		
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	

Technical parameters			
1	Nominal heat output	kW	10,0
2	Pressure required	Pa	12
3	Average efficiency	%	83,0
4	Average flue gas temperature	°C	206
5	Wood consuption	kg/h	3,2
6	Consumption of combustion air	m ³ /h od	30
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	10,4
9	Weight	kg	245
10	Required min. cross section for circulating air - INPUT	cm ²	300
11	Required min. cross section for circulating air - OUTPUT	cm ²	500
12	Three-component insulated chimney-active height 4m	Ø cm	180
13	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes

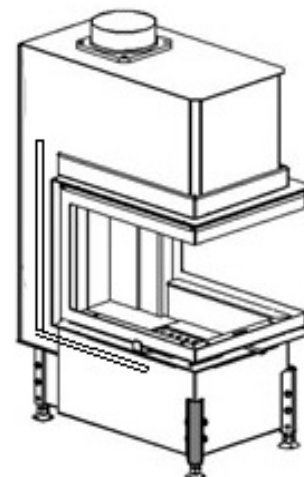

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: STN EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements