


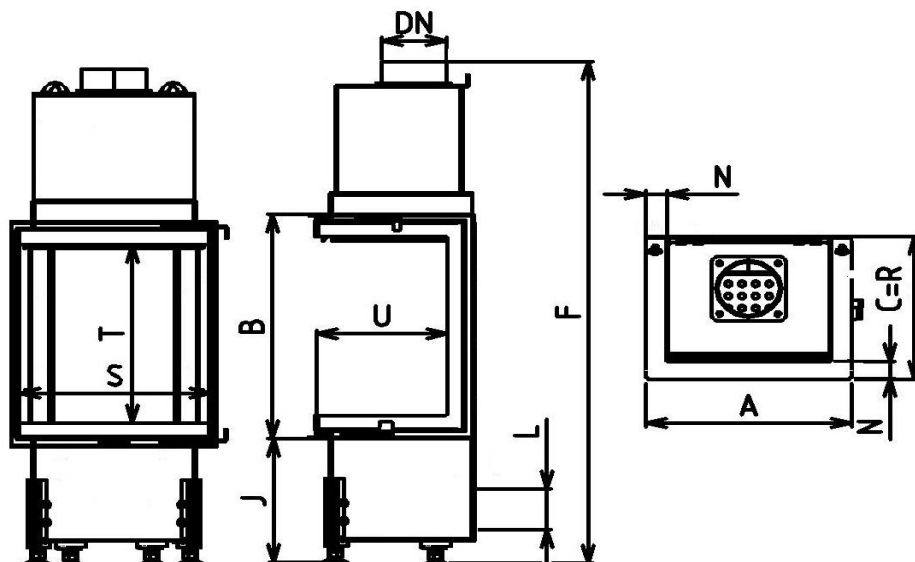

	Sizes		CHOPOK 2R90 50 LD2 500/630- S/400
1	A	mm	500
2	F	mm	1450
3	C	mm	400
4	DN	Ø mm	150
5	B	mm	630
6	FF	mm	
7	S	mm	465
8	T	mm	510
9	U	mm	365
10	J	mm	350 + /160/
11	R	mm	400
12	L	Ø mm	125
13	Mr	mm	
14	Rr	mm	

Basic design:

External air intel


Black vermiculite grooves lining (VEDRC)

Black printed glass(SM)

Removable cover frame (KR)

Inox control grip-handle RP2,R

Environmentally friendly varnish

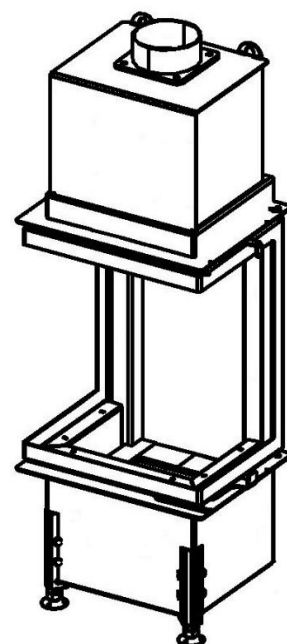

Technical parameters			
1	Nominal heat output	kW	8,5
2	Pressure required	Pa	12
3	Average efficiency	%	78,3
4	Average flue gas temperature	°C	223
5	Wood consupcion	kg/h	2,7
6	Consumption of combustion air	m ³ /hour	26
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	10,6
9	Weight	kg	215
10	Required min. cross section for circulating air - INPUT	cm ²	275
11	Required min. cross section for circulating air - OUTPUT	cm ²	425
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	no

Test Method : ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements